


Version

A0

new version

2020.12.11


Confirm:

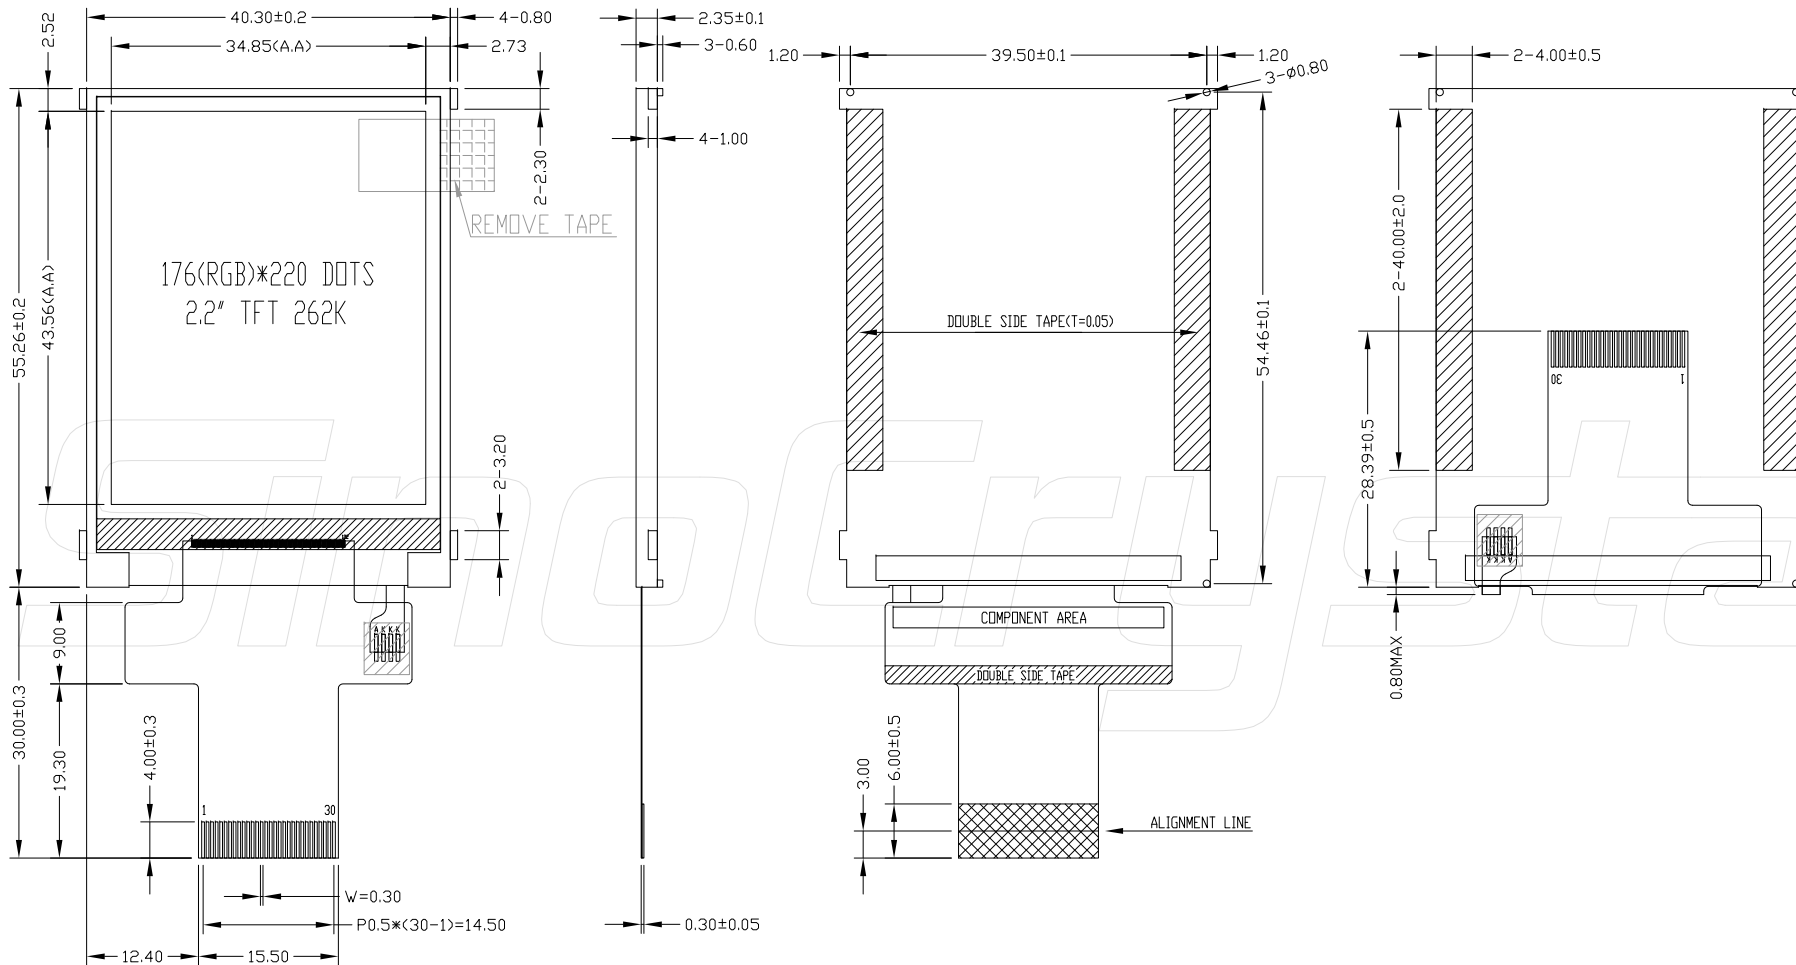


No.	PIN
1	D0
2	D1
3	D2
4	D3
5	GND
6	IDVCC
7	CS
8	RS
9	WR
10	RD
11	LEDA
12	LEDK1
13	LEDK2
14	LEDK3
15	D4
16	D8
17	D9
18	D10
19	D11
20	D12
21	D13
22	D14
23	D15
24	RESET
25	VCC
26	VCC
27	GND
28	D5
29	D6
30	D7

## SPECIFICATION:

- DISPLAY TYPE: 2.2" TFT, TRANSMISSIVE, NORMAL WHITE
- VIEWING ANGLE: 12:00(Gray Inversion) 6:00(Human Eye)
- OPERATION TEMPERATURE:  $-20^{\circ}\text{C} \text{ --- } +70^{\circ}\text{C}$
- STORAGE TEMPERATURE:  $-30^{\circ}\text{C} \text{ --- } +80^{\circ}\text{C}$
- DRIVER IC: ILI9225G
- BACKLIGHT: WHITE LED(I<sub>f</sub>=60mA, 3 LEDS)
- ALL UNMARKED TOLERANCES:  $\pm 0.2\text{mm}$



 **SinoCrystal (ShenZhen) Tech CO., LTD.**



Draw: LiuJun

Part NO.: SCT022004-V01

Unit: mm

Check:

Draw NO.: WXT-SCT022004-V01

Date: 2020.12.11

Approve:

Draw Ver: A0

Page: 1/1